


Traveler User Activity - change authentication URL

Introduction

By using our Traveler User Activity Sensor, you are able to get details about the mobile device syncs. The configuration itself is pretty simple because you can almost use the default settings of that sensor.

However in some cases (depending on the Traveler configuration) the authentication against the traveler server by using the default authentication URL “ /api/traveler/devices” doesn’t work.


In such case you need to change the authentication URL to simply point to the names.nsf.

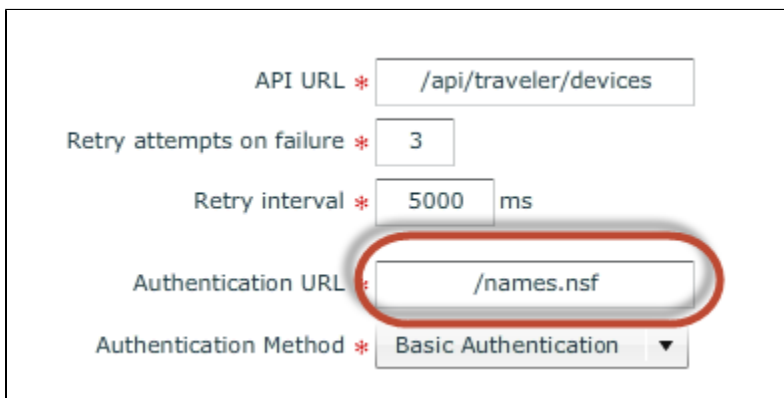

A screenshot of a configuration form for the Traveler User Activity sensor. The form contains the following fields and values:

- API URL *: /api/traveler/devices
- Retry attempts on failure *: 3
- Retry interval *: 5000 ms
- Authentication URL *: /names.nsf (This field is circled in red)
- Authentication Method *: Basic Authentication (dropdown menu)

In case you use Form Authentication, the Authentication URL differs:

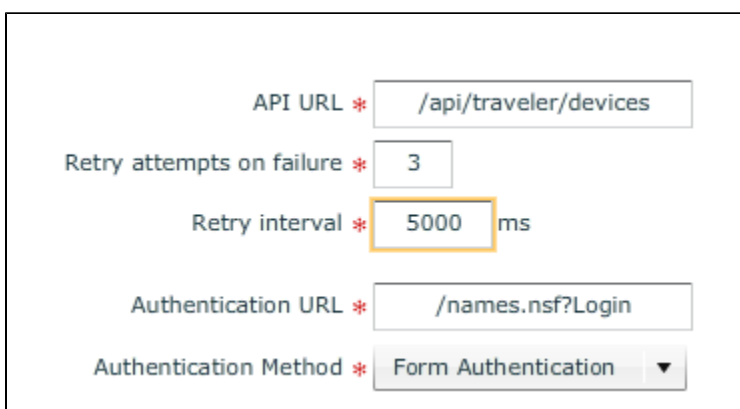

A screenshot of the same configuration form, but with Form Authentication selected. The values are:

- API URL *: /api/traveler/devices
- Retry attempts on failure *: 3
- Retry interval *: 5000 ms (The 5000 is highlighted with an orange box)
- Authentication URL *: /names.nsf?Login
- Authentication Method *: Form Authentication (dropdown menu)